




 Gauge **10**



The  

SIZES	REFERENCES
8	4530
10	4535

PACKAGING

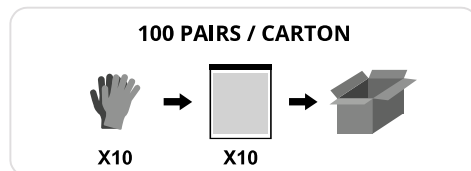

APPLICATION FIELDS

DESCRIPTION

Material palm >> Knit multifibers (fiber of the Kevlar® brand/Nylon/steel/cotton)
 Palm >> Coated micro-dots PVC
 Wrist >> Elastic

STANDARDS

CE This glove conforms to the personal protective equipment model covered by the EC type-examination certificate. **GB09/76628**.
 Delivered by **SGS (120)**

EN420:2003+A1:2009



EN388:2003

A	B	C	D
4	5	4	3



- Resistance to abrasion (4/4)
- Resistance to cutting (coupe-test) (5/5)
- Resistance to tearing (4/4)
- Resistance to puncturing (3/4)



EN407:2004

A	B	C	D	E
x	1	x	x	x
F				
x				



- Resistance to flammability (x/4)
- Resistance to contact heat (1/4)
- Resistance to convective heat (x/4)
- Resistance to radiant heat (x/4)
- Resistance to small splashes of molten metal (x/4)
- Resistance to large splashes of molten metal (x/4)